

NY-EXIT SERIES NEW YORK CITY LED EXIT SIGN



OVERVIEW

The NY-EXIT Series is one of the most popular New York City Approved fixtures offered and it is always available to ship immediately.

Exit signs are required to be installed throughout all types of commercial buildings in North America. New York City Approved exit signs are specifically designed for use throughout the five boroughs.

EXTERNAL SPECIFICATIONS

The housing is constructed from a durable and flame-retardant steel that is corrosion resistant. This LED exit sign combo comes standard in white. The universal mounting bracket is easy to snap-on to the back or top of the sign.


INTERNAL SPECIFICATIONS

The NY-EXIT Series is configured with universal 120/277V AC input and solid state charging circuitry. Low voltage disconnect, AC lockout, and brownout protection are included standard.


LED "EXIT" LIGHT SPECIFICATIONS

Red LED illumination consumes less than 5 watts electricity at all times. Maintenance-free LED technology features an expected LED lifespan is up to 15 years. The letters are 8" tall with a 1" stroke.

DIMENSIONS

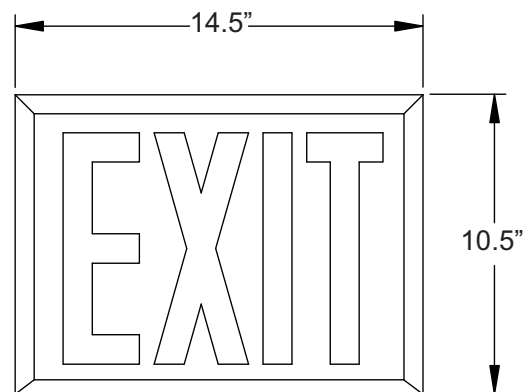

FRONT VIEW

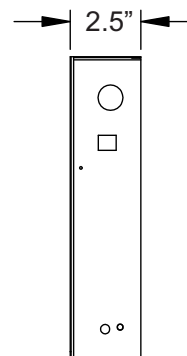

SIDE VIEW

ELECTRICAL SPECIFICATIONS

120/277V AC dual-voltage operation is standard. Other voltages available upon request such as 220V, 240V, and 480V.

CODE COMPLIANCE

New York City Approved. The NY-EXIT Series emergency light is compliant with building and fire code regulations throughout the United States and Canada. UL924 for USA and CUL for Canada. CSA Listed. NFPA 101 Life Safety Code, NEC, ICC, IBC, Damp Location Approved. NYC Approved.

**WARRANTY**

The NY-EXIT Series comes with a three-year factory warranty. The lamps are not covered. Deliberate damage, misuse, or improper installation effectively cancel the warranty. Battery features a 20% per year pro-rata warranty.

BATTERY BACKUP SYSTEM

The NY-EXIT Series features a maintenance free, sealed lead acid exit sign battery. The battery features a 24-hour recharge time and provides 90-minutes of emergency run time. Comes standard with a current charge regulator. Simply press the external test button to satisfy monthly and yearly testing requirements.

INSTALLATION

Metal exit signs, like the NY-EXIT Series, are only for indoor installation onto normally inflammable surfaces. Make sure to charge the unit for at least 24 hours before testing the battery backup system.

Relatively easy to install, the unit comes with detailed instructions and features a snap-together housing and universal mounting capability to make wall (back mount) installation quicker.

ORDERING INFORMATION

Series	Letter Color	Housing Color	Operation
NY-EXIT	R (red)	W (white)	BB (battery backup)